



90BF VARIABLE RELUCTANCE STEPPER MOTOR

MaxPulser

磁阻式步进电动机



接线图 Wiring Diagrams

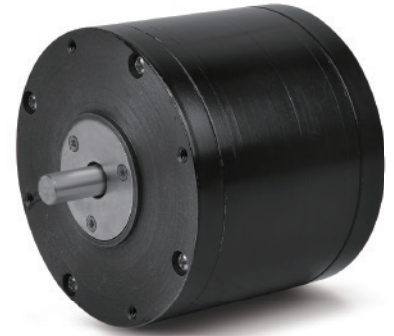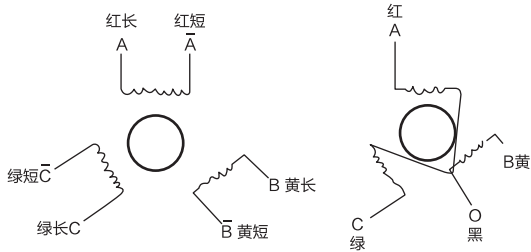


技术参数 Specifications

Model	Phases	Step Angle (°)	Voltage (V)	Current (A)	Holding Torque Nm (kg.cm)	No-load Starting Frequency (Hz)	Running Frequency (Hz)
型号	相数	步距角	电压	相电流	静力矩	空载起动频率	运行频率
90BF003	3	1.5/3	60	5	1.96(20)	1500	8000
90BC340A	3	1.5/3	60-110	6	3.92(40)	1500	8000
110BF003	3	0.75/1.5	80	6	7.84(80)	1500	7000
110BF004	3	0.75/1.5	30	4	4.9(50)	500	1000
110BC380B	3	0.75/1.5	80-300	6	9.8(100)	1350	15000
110BC380C	3	0.75/1.5	80-300	6	9.8(100)	1350	15000

Model	ΦD	ΦD1	Φb	E	L	h1	h2	Φd	ΦD2	Φd1
型号										
90BF003	90	70	92	25	125	3	6	9 ^{-0.011} _{-0.027}	107	6
90BC340A	90	70	92	25	145	3	6	9 ^{-0.011} _{-0.034}	107	8
110BF003	110	85	112	27	156	4	8	11 ^{-0.014} _{-0.034}	132	8
110BF004	110	85	112	27	111	4	8	11 ^{-0.014} _{-0.034}	132	8
110BC380B	110	85	112	66	206	4	8	14 ⁻⁰ _{-0.011}	132	8
110BC380C	110	85	112	35	206	4	8	14 ⁻⁰ _{-0.011}	132	8

*以上仅为代表性产品，可根据客户要求制作

力矩曲线 Torque Curves

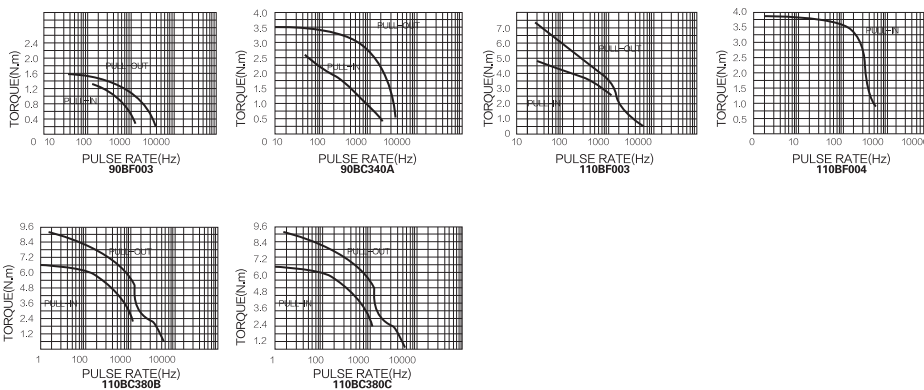

外型尺寸 Dimensions

